

UPRIGHT REACH-IN GLASS DOOR REFRIGERATOR

Top Mounted Condensing Unit



ES – Series • ESGWR2

WARRANTY

5 YEAR Compressor
3 YEAR Parts & Labor



 **Operating temperature range is 33°F ~ 54°F**

Contact

201 W. Artesia Blvd, Compton, CA 90220
T. (310) 323-6586, (800) 444-6285 F. (310) 323-7524, (310) 761-1127



Please visit our website for updated Energy Efficiency information

Cabinet Construction

Heavy duty stainless steel interior and exterior, with galvanized steel finished top, bottom and back wall of exterior. ABS evaporator drain cover. 2.5" thick high density foamed-in-place polyurethane insulation. Four 4" diameter casters (front casters with brakes). Door heater installed around inside cabinet frame to prevent moisture build-up.

Refrigeration System

- Self-contained condensing unit located at top of cabinet for high performance
- Oversized condenser and evaporator coils quickly achieve and maintain desired temperature
- Forced-air cooling with multiple evaporator fan motors providing balanced airflow throughout cabinet to ensure faster temperature drop
- Environmentally friendly CFC free R-134A refrigerant
- Adjustable, time initiated defrost cycle of 3 to 12 hours with 350 watt defrost heater, both time and temperature terminated for fail-safe operation
- Automatic evaporator fan motor delay after defrost cycle
- Copper tube and aluminum fin evaporator with anti-corrosive coating
- Exterior anodized aluminum drain pan for self sufficient condensation removal
- Pressure relief ports for rapid cabinet re-entry
- Interior airflow backguard to ensure proper air circulation
- Pre-wired and ready to plug, 115V/60Hz/1Ph, NEMA 5-15P

Doors

- Matte finish aluminum door frames (available from 2016 model)
- Low emissivity double pane glass system reflects UV rays and improves insulation for maximized energy efficiency
- Heavy duty adjustable torsion spring self-closing door system
- One piece snap-in magnetic door gaskets for easy replacement
- Heavy duty die-cast door handles
- Field reversible doors

Lighting

- Shielded vertical LED interior lighting with on/off switch for energy saving, less heat generation and enhanced illumination

Shelving

- Four epoxy coated wire shelves per section
- Stainless steel pilasters and shelf clips

Temperature Control

- Factory preset temperature, 35°F
- Temperature setting range from 33°F to 54°F
- Easy to read digital temperature display
- Easy to program push button temperature control
- Microchip digital control and monitoring system with a variety of functions to monitor and maintain optimum temperature

Model	# of Doors	Capacity (Cu. Ft.)	HP	Refrigerant	# of Shelves	Power (V-Hz-Ph)	Amps	Crated Weight	Exterior Dimensions		
									L	D†	H*
ESGWR2	2	55	1/3+	R-134A	8	115-60-1	11.00	514lbs (233.1kg)	59" (1260 mm)	31 5/8" (803 mm)	74 1/4" (1885 mm)

Disclaimer: Product dimensions are for general purposes and not absolute value. Slight variations may exist. If dimensions are critical, please contact Everest.

†: Exterior depth dimension does not include 1-1/2" for door handles
*: Height does not include 5" for casters

UPRIGHT REACH-IN GLASS DOOR REFRIGERATOR

Top Mounted Condensing Unit



EVEREST
REFRIGERATION

www.EVERESTref.com

ES – Series • ESGWR2

DIMENSIONAL DATA	
Net capacity cu. ft. 55 (1557.4 cu l)	
Exterior (mm)	Length Overall in. 59" (1500)
	Depth Overall in.† 31 5/8" (803)
	Height Overall in.* 74 1/4" (1885)
Interior (mm)	Length Overall in. 53 7/8" (1370)
	Depth Overall in. 26 3/4" (680)
	Height Overall in. 57" (1450)
Crated Weight	514lbs (233.1kg)
# of Doors	2
# of Shelves	8
Shelf Size Length x Depth in. (mm)	26" x 24" (660 x 610)
ELECTRICAL DATA	
Voltage	115-60-1 (V-Hz-Ph)
Full load amperes	11.00
Feed wires with Ground	3
Cord Length ft.	9
REFRIGERATION DATA	
Refrigerant	R-134A
Compressor H.P.	1/3+ HP
BTU/HR ^a (Kcal/h)	3268 (824)


Specifications subject to change without notice.

- *: Height does not include 5" for casters.
- †: Exterior depth dimension does not include 1-1/2" for door handles.
- a: Based on evaporating temperature of 23°F(-5°C) & Condensing temperature of 131°F(55°C).

Equipped With One NEMA 5-15P Plug



Dimensions (mm)

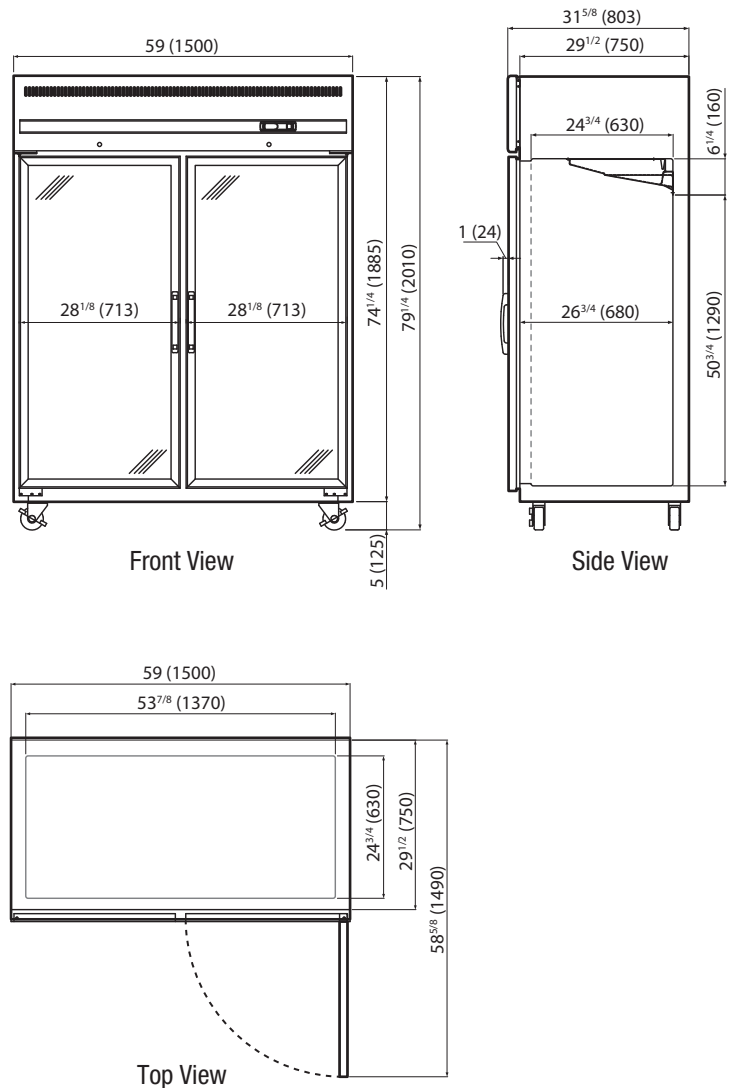

Specifications subject to change without notice.



- Project / Customer _____
- Item No. _____
- Model No. _____



Warranty
 5 Year — Compressor Warranty
 3 Year — Parts & Labor Warranty

Contact



201 W. Artesia Blvd, Compton, CA 90220
 T. (310) 323-6586, (800) 444-6285
 F. (310) 323-7524, (310) 761-1127